







IMG_9475.jpeg

























IMG_9489.jpeg











IMG_9494.jpeg








CAUTION

WHEEL TORQUE REQUIREMENTS

Wheel nuts or bolts must be tightened and maintained at the proper torque levels to prevent loose wheels, broken studs, and possible dangerous separation of wheels from your axles, which can lead to an accident, personal injuries or death. Re-torque after the first 10 miles, 25 miles, and again at 50 miles.

1/2-20	90-120 Ft. Lbs.
9/16-18	140-170 Ft. Lbs.
5/8-18	190-210 Ft. Lbs.
90° Cone Nut With Clamp Ring	
5/8-18	275-325 Ft. Lbs.
Non-Swiveling Flange Nut	
5/8-18	150-175 Ft. Lbs.
Swiveling Flange Nut	

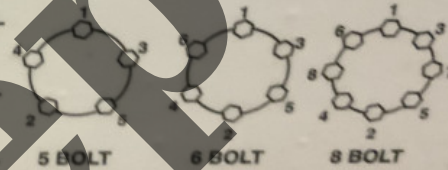

Label No. 059-900-00 Rev.C







