



Le poids du chargement ne doit jamais dépasser
1334 Kgs or 2941 Lbs

PNEU	DIMENSIONS	PRESSION DES PNEUS À FROID	
AVANT	ST225/75R15D	65 lb/po2 448 KPA	VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS
ARRIÈRE	ST225/75R15D	65 lb/po2 448 KPA	
DE SECOURS	ST225/75R15D	65 lb/po2 448 KPA	

rest River, Inc.
B 93120 Compliant
With applicable
Phase 2 emission

MANUFACTURED BY / FABRIQUE PAR FOREST RIVER, INC.

VINYLITY 5ZT3CLSB8CA305683

GVWR/PNBV 5080 KG (11200 LB)

Coupler Size: CLF269BHS
CLA305683

GVWR/PNBV	TIRE NEUVE	RIMS/JANTE	COLD INFL. PR. CONF.
2304 KG			448 KPA
5080 KG	ST225/75R15D	15X6J	65 PSI
			0 PSI
	ST225/75R15D	15X6J	65 PSI

Entrepreneur

IMG_7372.jpeg



IMG_7373.jpeg



IMG_7374.jpeg



Entrepreneur

IMG_7375.jpeg



IMG_7376.jpeg



IMG_7377.jpeg



IMG_7379.jpeg





IMG_7381.jpeg



IMG_7382.jpeg



IMG_7378.jpeg



IMG_7383.jpeg



IMG_7384.jpeg



IMG_7389.jpeg



IMG_7388.jpeg



IMG_7387.jpeg



IMG_7386.jpeg



IMG_7385.jpeg



IMG_7394.jpeg



IMG_7393.jpeg



IMG_7392.jpeg



IMG_7391.jpeg



IMG_7390.jpeg



IMG_7399.jpeg



IMG_7398.jpeg



IMG_7397.jpeg



IMG_7396.jpeg



IMG_7395.jpeg



IMG_7404.jpeg



IMG_7403.jpeg



IMG_7402.jpeg



IMG_7401.jpeg



IMG_7400.jpeg



IMG_7409.jpeg



IMG_7408.jpeg



IMG_7407.jpeg



IMG_7406.jpeg



IMG_7405.jpeg



IMG_7410.jpeg



IMG_7411.jpeg




IMG_7412.jpeg



IMG_7413.jpeg



IMG_7414.jpeg

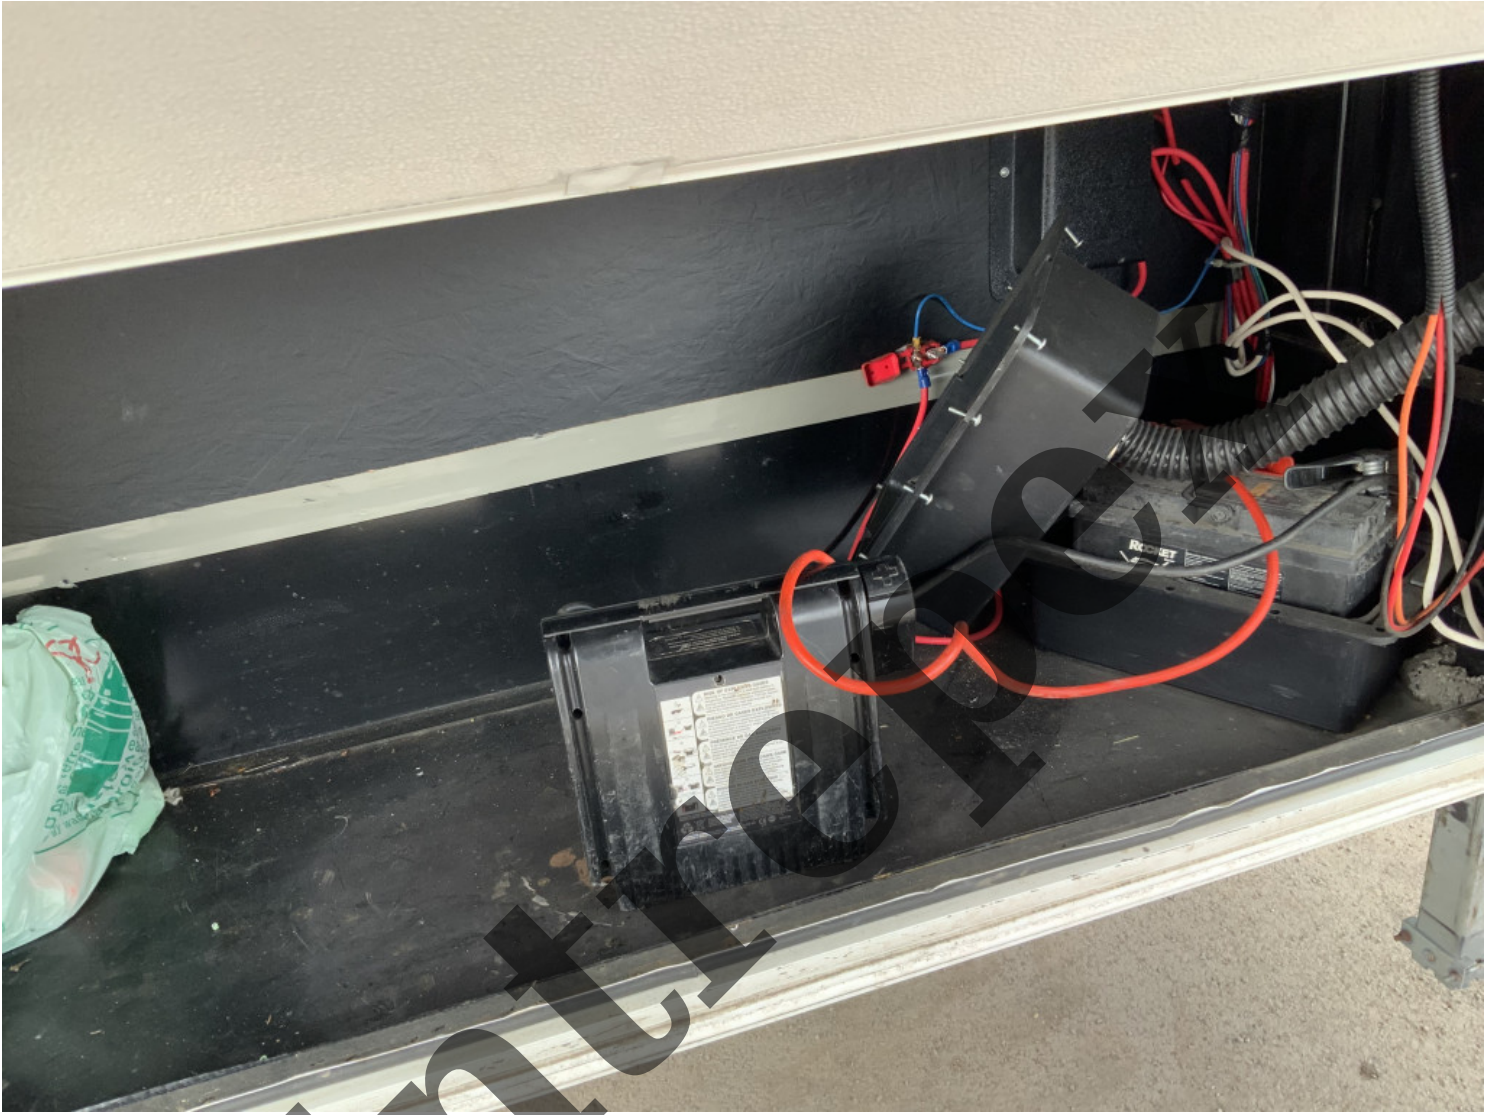



IMG_7416.jpeg





IMG_7418.jpeg





IMG_7420.jpeg



IMG_7421.jpeg



IMG_7422.jpeg





IMG_7424.jpeg



IMG_7425.jpeg



IMG_7426.jpeg



IMG_7427.jpeg





IMG_7429.jpeg





IMG_7432.jpeg



RECREATIONAL VEHICLE TRAILER CARGO CARRYING CAPACITY
 Dry Weight: 8200 VIN: 5ZT3CLSB8CA305683
 THE WEIGHT OF CARGO SHOULD NOT EXCEED
 1334 kg, or 2941 lbs
 CAUTION:
 A full load of water equals 177 kg or 392 lbs of cargo @ 1 kg/L (8.33 lb/gal)

RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT
 Le poids de chargement ne doit jamais dépasser
 1334 Kgs or 2941 Lbs

PNEU	DIMENSIONS	PRESSION DES PNEUS À FROID	VOIR LE MANUEL
AVANT	ST225/75R15D	85 lb/ps2 448 KPA	DE L'USAGER
ARRIÈRE	ST225/75R15D	85 lb/ps2 448 KPA	POUR PLUS DE
DE SECOURS	ST225/75R15D	85 lb/ps2 448 KPA	RENSEIGNEMENTS

TIRE AND LOADING INFORMATION
 The combined weight of Cargo should Never Exceed
 1334 Kgs or 2941 Lbs

TIRE	SIZE	COLD TIRE PRESSURE	SEE OWNER'S
FRONT	ST225/75R15D	85 PSI/448 KPA	MANUAL FOR
REAR	ST225/75R15D	85 PSI/448 KPA	ADDITIONAL
SPARE	ST225/75R15D	85 PSI/448 KPA	INFORMATION

Forest River, Inc.
 CARB 93120 Compliant
 With applicable
 Phase 2 emission

VEHICLE IDENTIFICATION NUMBER	5ZT3CLSB8CA305683	TRA/REM	TRA/REM
GVWR/PWBV	5080 KG (11200 LB)	CLF269BHS	CLA305683
Coupler Size			
WEIGHT	2304 KG		
	5080 LBS	ST225/75R15D	15X6J
HEIGHT	0 IN		
	0 IN		
WEIGHT	2304 KG		
	5080 LBS	ST225/75R15D	15X6J

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN MOTOR VEHICLE SAFETY REGULATIONS IN EFFECT ON THE DATE OF MANUFACTURE.

CE VEHICULE EST CONFORME A TOUTES LES NORMES QUI SONT APPLICABLES EN VERTU DU RÈGLEMENT SUR LA SECURITE DES VEHICLES AUTOMOBILES DU CANADA EN VIGEUR A LA DATE DE SA FABRICATION.

