

IMG\_8762.jpeg



IMG\_8763.jpeg



IMG\_8764.jpeg



IMG\_8765.jpeg



IMG\_8766.jpeg



IMG\_8767.jpeg



IMG\_8768.jpeg



IMG\_8769.jpeg



IMG\_8770.jpeg



IMG\_8771.jpeg





IMG\_8773.jpeg



IMG\_8802.jpeg



IMG\_8803.jpeg



IMG\_8806.jpeg



IMG\_8807.jpeg



IMG\_8808.jpeg



IMG\_8809.jpeg



IMG\_8810.jpeg



IMG\_8811.jpeg



IMG\_8812.jpeg



IMG\_8813.jpeg



IMG\_8814.jpeg



IMG\_8815.jpeg



IMG\_8816.jpeg



IMG\_8817.jpeg



IMG\_8818.jpeg



IMG\_8819.jpeg



IMG\_8820.jpeg




IMG\_8821.jpeg



IMG\_8822.jpeg



IMG\_8804.jpeg

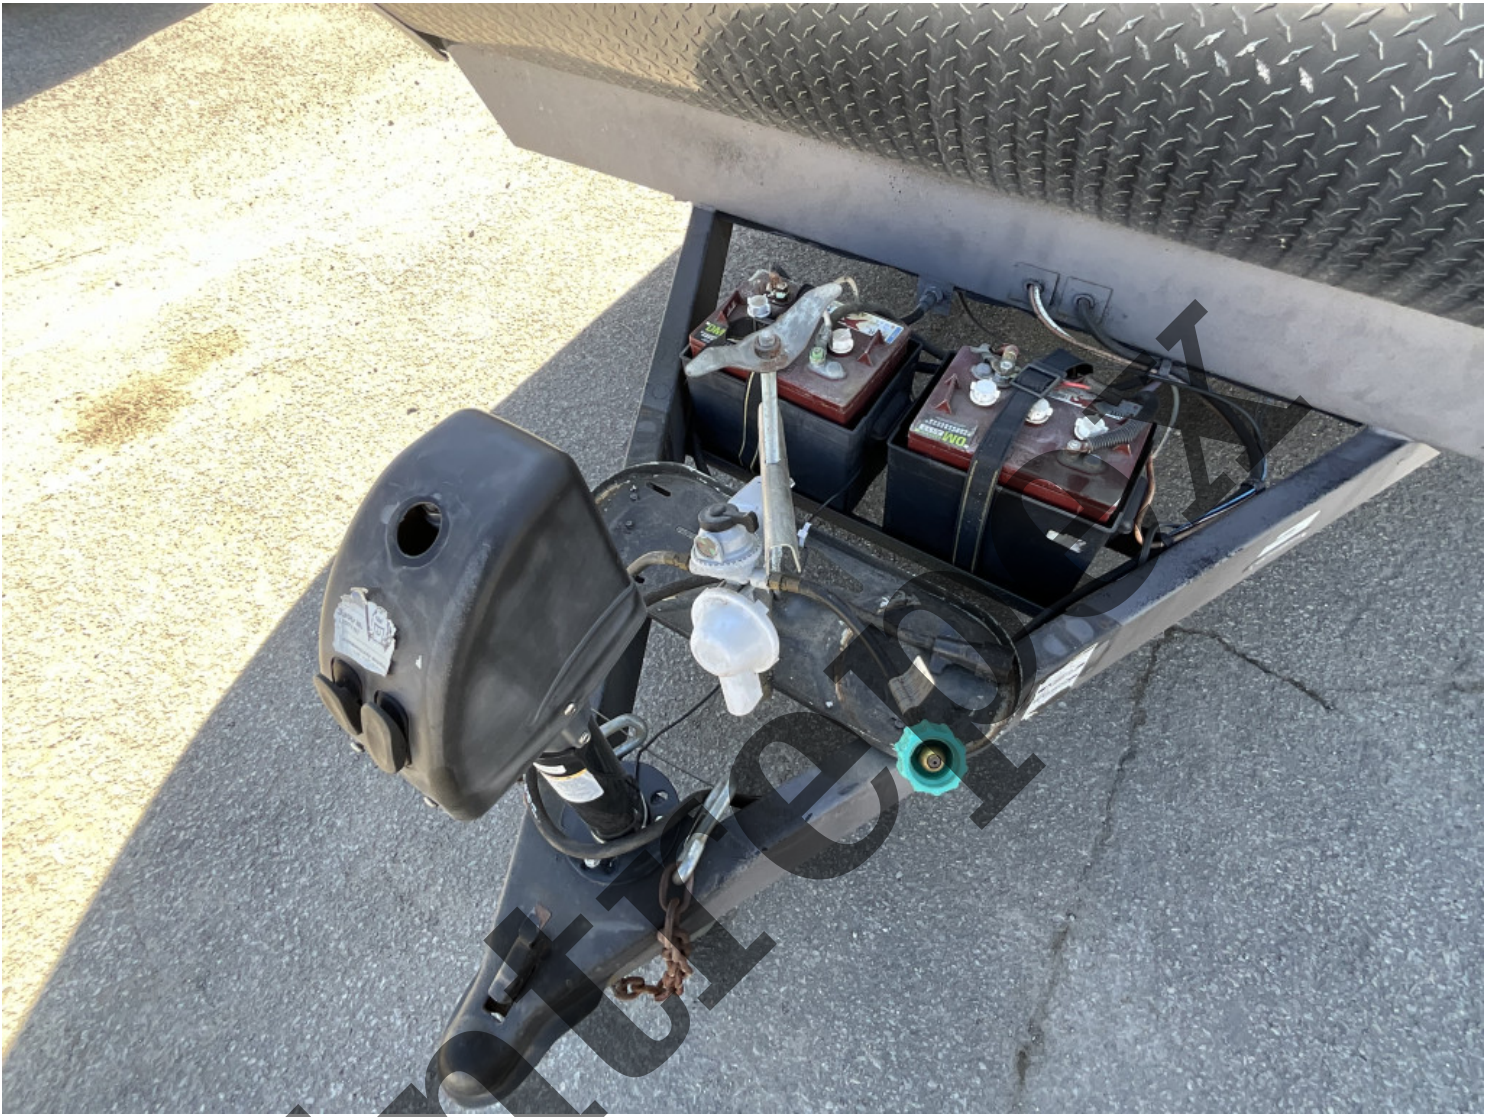



IMG\_8776.jpeg



IMG\_8777.jpeg



Entreprex

IMG\_8778.jpeg



IMG\_8779.jpeg



IMG\_8780.jpeg





RACER  
ULTRA LITE

ENTREPRENEURS

IMG\_8782.jpeg



IMG\_8783.jpeg





IMG\_8785.jpeg



IMG\_8786.jpeg



IMG\_8787.jpeg



IMG\_8788.jpeg



IMG\_8789.jpeg



IMG\_8790.jpeg



IMG\_8791.jpeg





IMG\_8793.jpeg



IMG\_8794.jpeg





IMG\_8796.jpeg



IMG\_8797.jpeg









IMG\_8801.jpeg



IMG\_8824.jpeg



IMG\_8827.jpeg






IMG\_8823.jpeg



IMG\_8825.jpeg





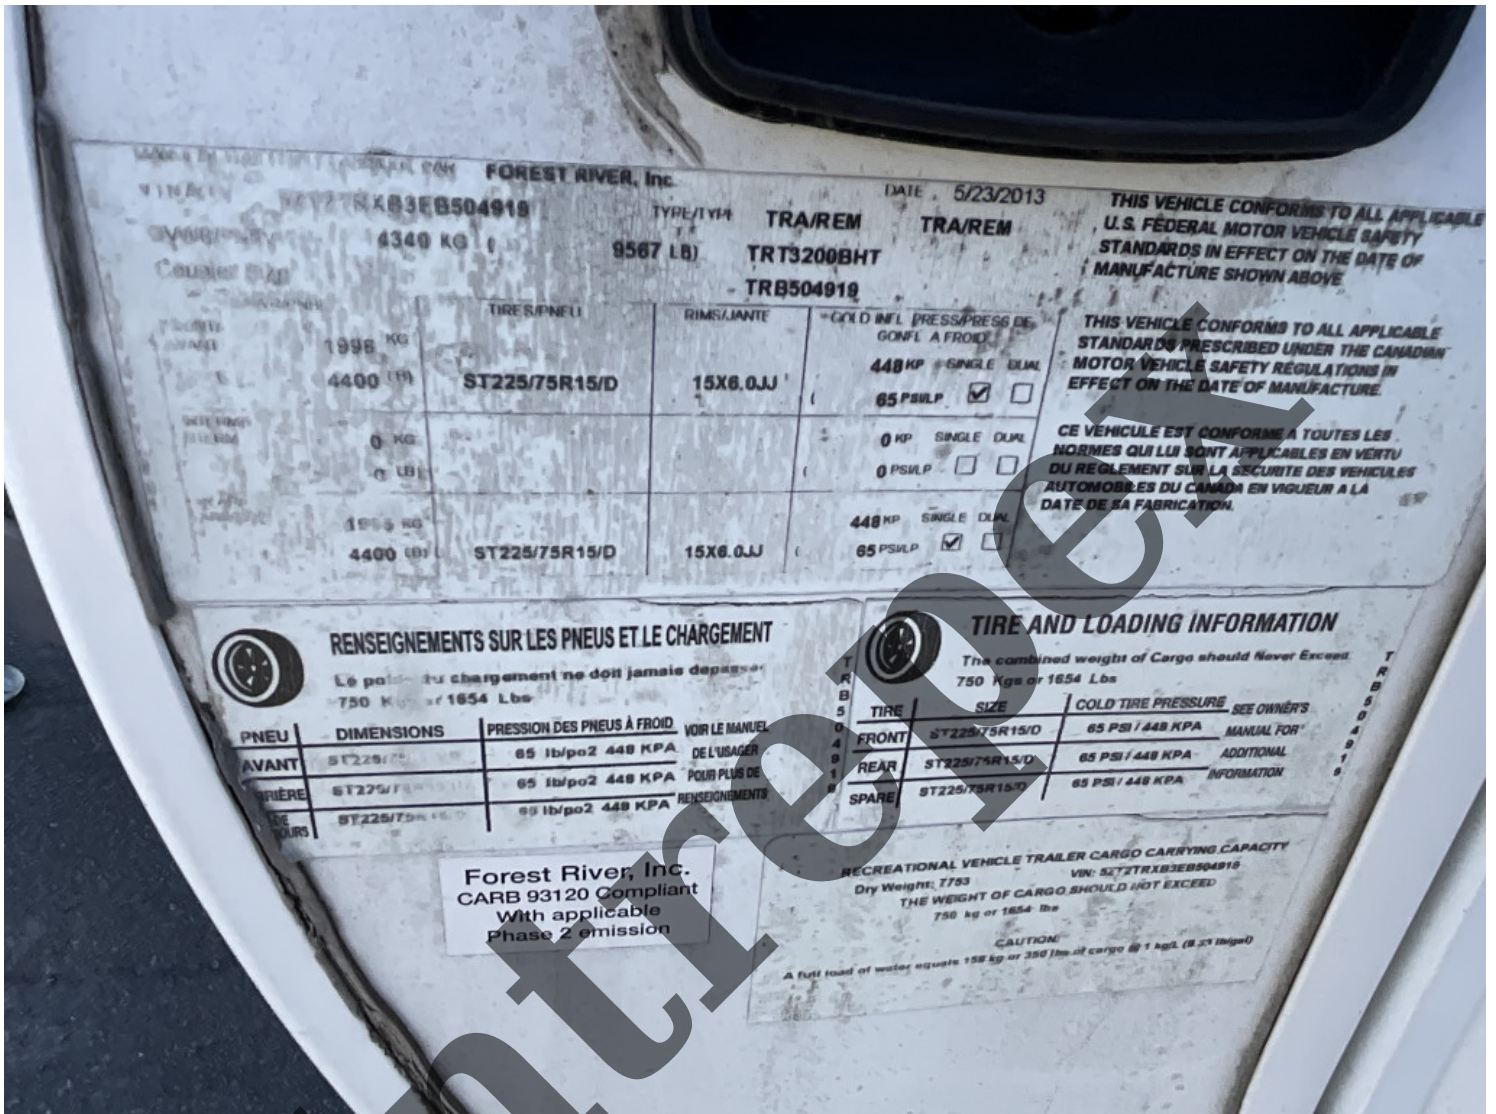

MANUFACTURED BY FOREST RIVER, Inc. DATE 5/23/2013  
 VIN: 5T2TRXB3EB504919 TYPE/TYPE TRA/REM TRA/REM  
 GVWR: 4340 KG (9567 LB) TRT3200BHT  
 CURB WT: 1996 KG (4400 LB) TRB504919

THIS VEHICLE CONFORMS TO ALL APPLICABLE  
 U.S. FEDERAL MOTOR VEHICLE SAFETY  
 STANDARDS IN EFFECT ON THE DATE OF  
 MANUFACTURE SHOWN ABOVE

WEIGHT	TIRE/PNEU	RIMS/JANTE	COLD INFL PRESS/PRESS DE GONFL A FROID
1996 KG (4400 LB)	ST225/75R15/D	15X6.0JJ	448 KPA SINGLE DUAL 65 PSILP <input checked="" type="checkbox"/> <input type="checkbox"/>
0 KG (0 LB)			0 KPA SINGLE DUAL 0 PSILP <input type="checkbox"/> <input type="checkbox"/>
1996 KG (4400 LB)	ST225/75R15/D	15X6.0JJ	448 KPA SINGLE DUAL 65 PSILP <input checked="" type="checkbox"/> <input type="checkbox"/>

THIS VEHICLE CONFORMS TO ALL APPLICABLE  
 STANDARDS PRESCRIBED UNDER THE CANADIAN  
 MOTOR VEHICLE SAFETY REGULATIONS IN  
 EFFECT ON THE DATE OF MANUFACTURE.

CE VEHICULE EST CONFORME A TOUTES LES  
 NORMES QUI LUI SONT APPLICABLES EN VERTU  
 DU REGLEMENT SUR LA SECURITE DES VEHICULES  
 AUTOMOBILES DU CANADA EN VIGUEUR A LA  
 DATE DE SA FABRICATION.



**RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT**

Le poids du chargement ne doit jamais dépasser  
 750 Kg ou 1654 Lbs

PNEU	DIMENSIONS	PRESSION DES PNEUS A FROID	VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS
AVANT	ST225/75R15/D	65 lb/ps2 448 KPA	
ARRIERE	ST225/75R15/D	65 lb/ps2 448 KPA	
RESERVE	ST225/75R15/D	65 lb/ps2 448 KPA	



**TIRE AND LOADING INFORMATION**

The combined weight of Cargo should Never Exceed  
 750 Kgs or 1654 Lbs

TIRE	SIZE	COLD TIRE PRESSURE	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION
FRONT	ST225/75R15/D	65 PSI / 448 KPA	
REAR	ST225/75R15/D	65 PSI / 448 KPA	
SPARE	ST225/75R15/D	65 PSI / 448 KPA	

Forest River, Inc.  
 CARB 93120 Compliant  
 With applicable  
 Phase 2 emission

RECREATIONAL VEHICLE TRAILER CARGO CARRYING CAPACITY  
 Dry Weight: 7793 VIN: 5T2TRXB3EB504919  
 THE WEIGHT OF CARGO SHOULD NOT EXCEED  
 750 kg or 1654 lbs

CAUTION:  
 A full load of water equals 158 kg or 350 lbs of cargo @ 1 gal. (8.33 lbs/gal)

IMG\_8836.jpeg



IMG\_8835.jpeg



IMG\_8834.jpeg



IMG\_8833.jpeg



IMG\_8832.jpeg

