



IMG_3101.jpeg



IMG_3102.jpeg



IMG_3104.jpeg



IMG_3105.jpeg



IMG_3106.jpeg



IMG_3107.jpeg



IMG_3108.jpeg



IMG_3109.jpeg



IMG_3110.jpeg



IMG_3113.jpeg



IMG_3112.jpeg



IMG_3111.jpeg



IMG_3114.jpeg



IMG_3115.jpeg



IMG_3116.jpeg



IMG_3119.jpeg



IMG_3121.jpeg



IMG_3122.jpeg




IMG_3123.jpeg





Entreprexx

IMG_3128.jpeg

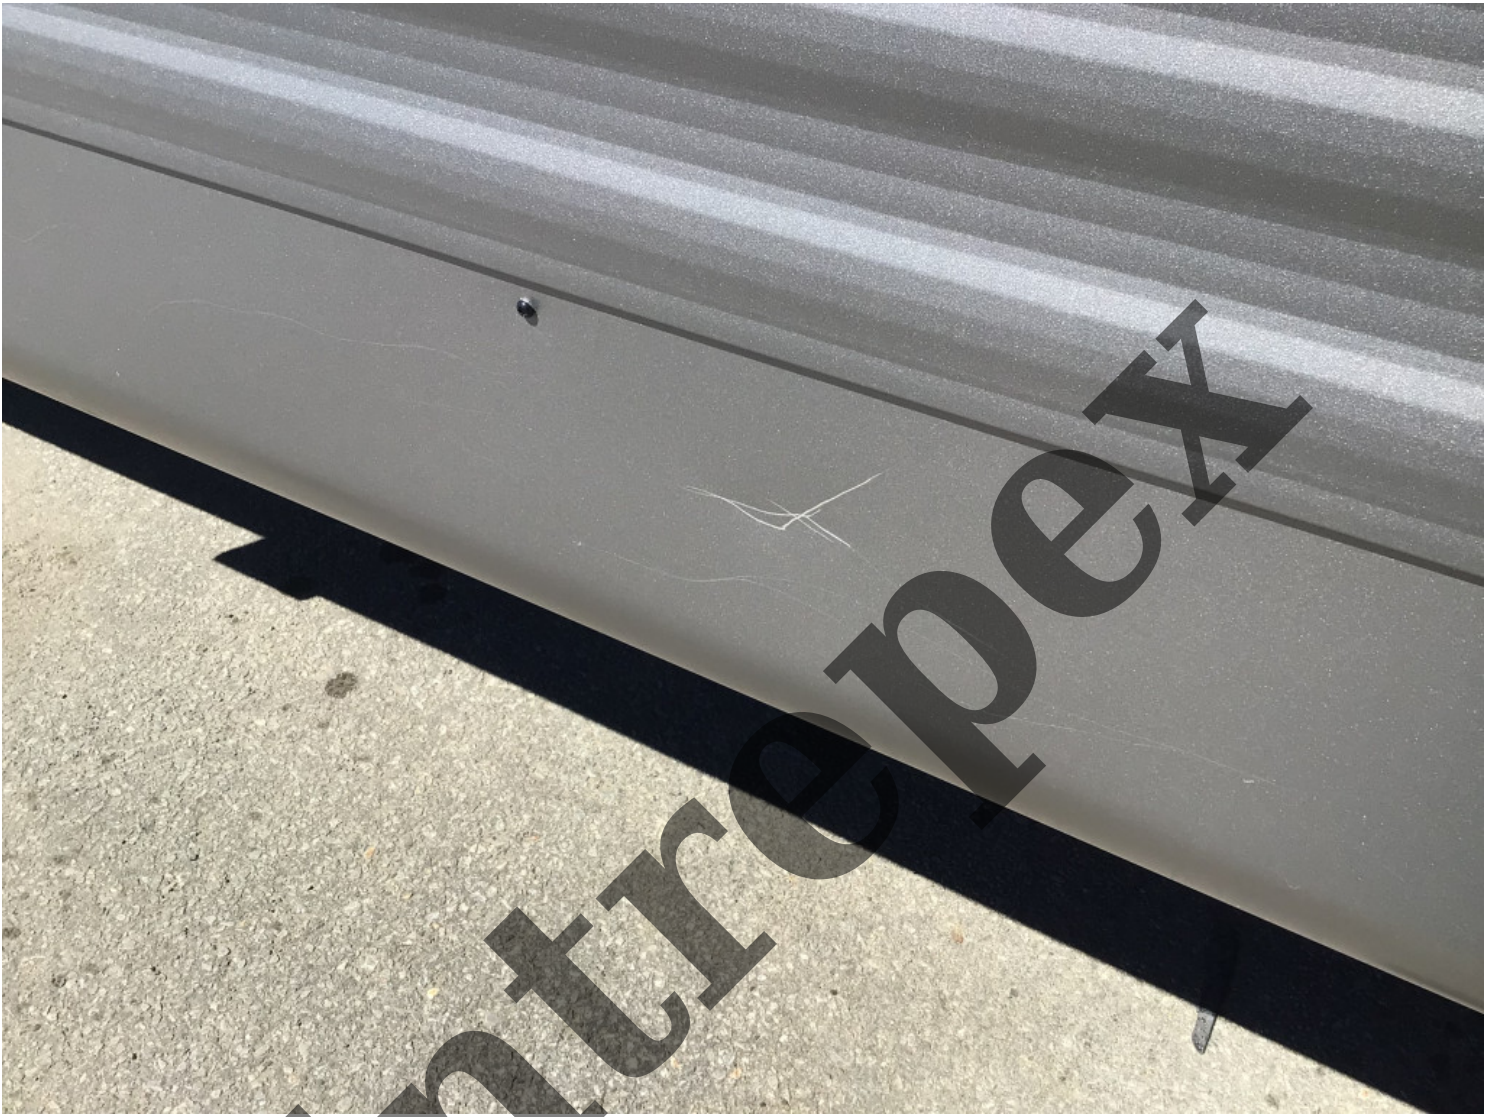

MANUFACTURED BY / FABRIQUE PAR: **FOREST RIVER, INC.** DATE: **04/13/2021**
 VIN/NV: **5ZT2SSRB2ME017182** SST26DB SSE017182
 GVWR/PBV: **3153 KG 6950 LB** TYPE/TYF: **TRA/REM**

COUPLER SIZE: _____ TIRES/PNEU: _____ RIMS/JANTE: _____ COLD INFL PRESS/PRESS DE GONFL A FROID: _____

AXLE POSITION	GVWR/PBV (KG/LB)	TIRES/PNEU	RIMS/JANTE	COLD INFL PRESS/PRESS DE GONFL A FROID (KPA/PSI)	SINGLE	DUAL
FRONT/AVANT	1588 KG (3500 LB)	ST205/75R14/D	14X5.0J	448 KPA (65 PSI)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
INTERMEDIATE	0 KG (0 LB)			0 KPA (0 PSI)	<input type="checkbox"/>	<input type="checkbox"/>
REAR/ARRIERE	1588 KG (3500 LB)	ST205/75R14/D	14X5.0J	448 KPA (65 PSI)	<input checked="" type="checkbox"/>	<input type="checkbox"/>

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE.

THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN MOTOR VEHICLE SAFETY REGULATIONS IN EFFECT ON THE DATE OF MANUFACTURE.

CE VEHICULE EST CONFORME A TOUTES LES NORMES QUI SONT APPLICABLES EN VERTU DU REGLEMENT SUR LA SECURITE DES VEHICULES AUTOMOBILES DU CANADA EN VIGUEUR A LA DATE DE SA FABRICATION.

TIRE AND LOADING INFORMATION


The combined weight of Cargo should Never Exceed: **743 Kgs or 1638 Lbs**

TIRE	SIZE	COLD TIRE PRESSURE	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION
FRONT	ST205/75R14/D	65 PSI / 448 KPA	
REAR	ST205/75R14/D	65 PSI / 448 KPA	
SPARE	ST205/75R14/D	65 PSI / 448 KPA	

RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT

Le poids du chargement ne doit jamais dépasser **743 Kgs or 1638 Lbs**

PNEU	DIMENSIONS	PRESSIION DES PNEUS A FROID	VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS
AVANT	ST205/75R14/D	65 lb/po2 448 KPA	
ARRIERE	ST205/75R14/D	65 lb/po2 448 KPA	
DE SECOURS	ST205/75R14/D	65 lb/po2 448 KPA	

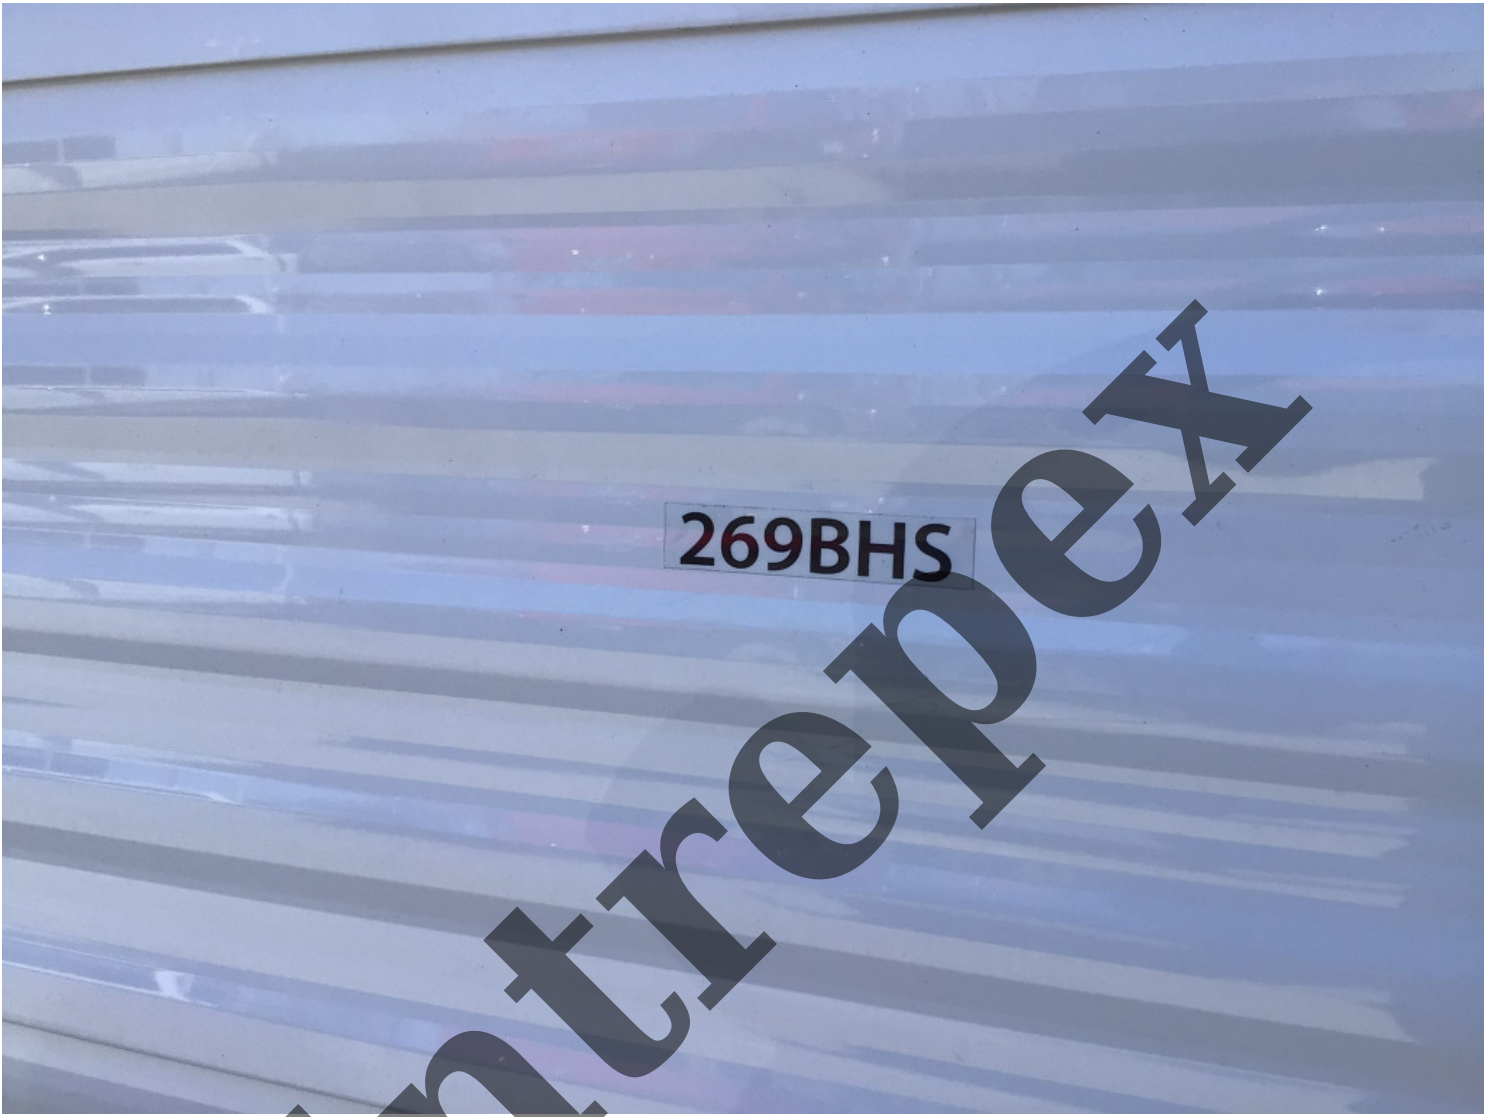

Entrepreneur