

20260528\_133525.jpg





20260528\_133542.jpg



20260528\_133557.jpg



20260528\_133602.jpg





20260528\_133612.jpg



20260528\_133617.jpg





Entrepreneur

20260528\_133626.jpg





20260528\_133638.jpg



20260528\_133642.jpg



MANUFACTURED BY/FABRIQUE PAR: CrossRoads RV DATE: 7/9/2012  
305 Hawpatch Drive  
Topeka, IN 46571

GVWR/PNBV 5576.01 KG (12293.00 LB)  
GAWR (EACH AXLE)/PNBE(CHAQUE ESSIEU) 2358.68 KG (5200.00 LB)  
TIRE/PNEU 235/80R 16E RIMS/JANTE 16 X 6K  
COLD INFL. PRESS/PRESS. DE GONFL. A FROID 551.58 KPA (80.00 PSI/LPC)

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE. THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN MOTOR VEHICLE SAFETY REGULATIONS IN EFFECT ON THE DATE OF MANUFACTURE. - CE VEHICULE EST CONFORME A TOUTES LES NORMES QUI LUI SONT APPLICABLES EN VERTU DU REGLEMENT SUR LA SECURITE DES VEHICULES AUTOMOBILES DU CANADA EN VIGUEUR A LA DATE DE SA FABRICATION.

V.I.N./N.I.V.: 4V0FC3124DE011228 TYPE/TYPE: TRAILER TRA/REM: CF310QB13

CARGO-CARRYING CAPACITY: 1376.02 KG  
CALCULATED WITH THE FRESH WATER  
TANKS FULL (COLD 181 KG.  
HOT 38 KG.)

AND THE WASTE WATER TANKS EMPTY  
MASS OF WASTE WATER  
TANKS FULL: 452 KG

CAPACITÉ DE CHARGEMENT: 1376.02 KG  
CALCULÉE AVEC LES RÉSERVOIRS D'EAU  
DOUCE PLEINS (FROID 181 KG.  
CHAUD 38 KG.)

ET LES RÉSERVOIRS D'EAUX USÉES VIDES  
MASSE DES RÉSERVOIRS D'EAUX  
USÉES PLEINS: 452 KG

F  
A  
R  
ARR  
SPA  
DE SEC

ENTREPRENEUR




**TIRE AND LOADING INFORMATION**  
**RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT**

The weight of cargo should never exceed 1567.16 KG  
or 3455 LBS. Le poids de chargement ne devrait  
jamais excéder 1567.16 KG ou 3455 LBS.

TIRE PNEU	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS A FROID	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS
FRONT AVANT	235/80R 16E	552 KPA /80 PSI	
REAR ARRIERE	235/80R 16E	552 KPA /80 PSI	
SPARE DE SECOURS	235/80R 16E	552 KPA /80 PSI	

C)  
HICILE CONFORME  
LE EST CONFORME  
DE SA FABRICATION  
OQB13  
6.02 KG  
RS D'EAU  
KG.  
(KG.)  
SÉES VIDES  
AUX

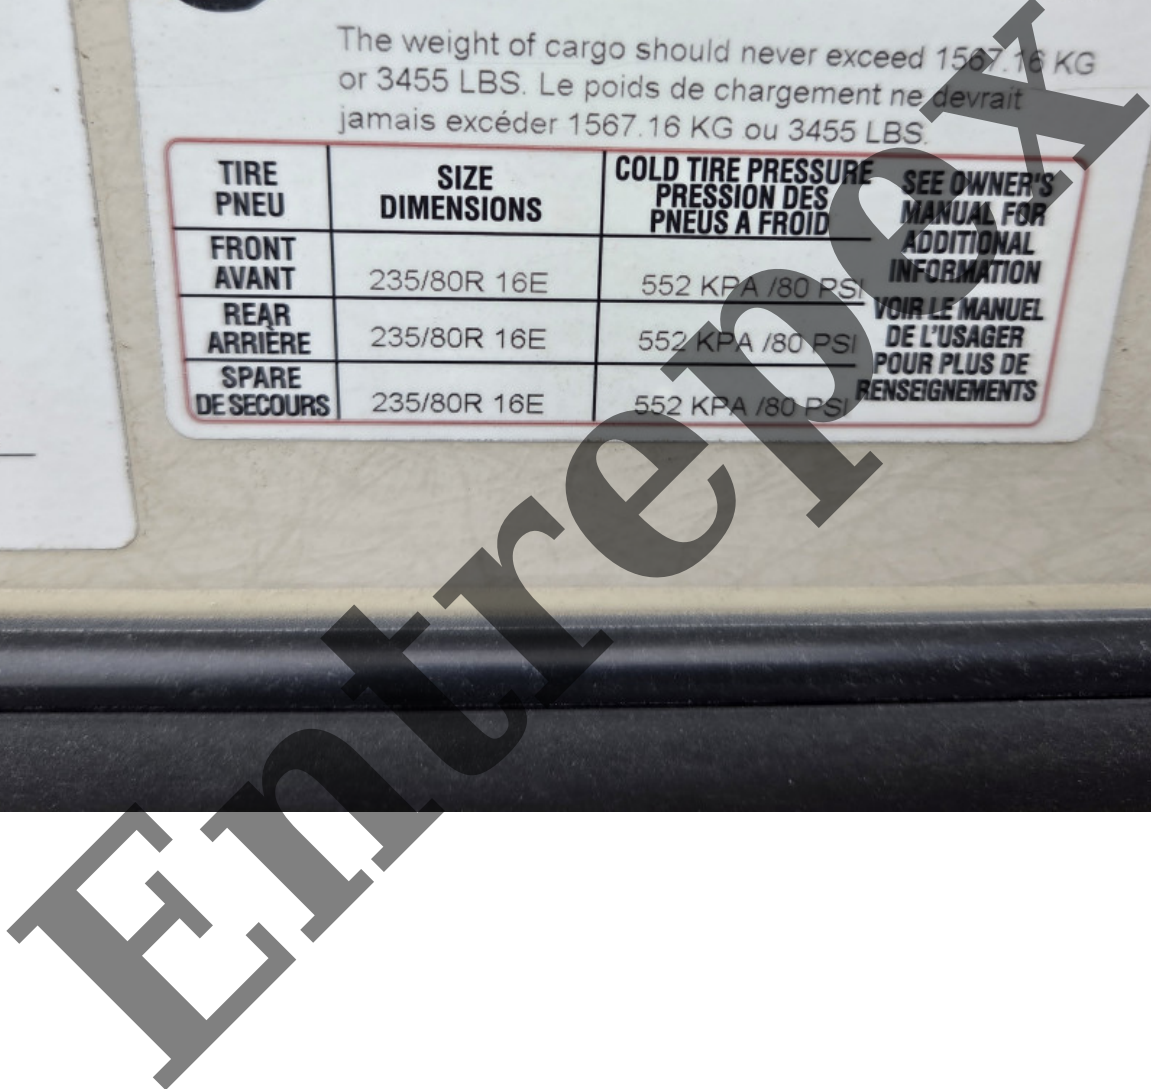

20260528\_133659.jpg



20260528\_133704.jpg



20260528\_133716.jpg











20260528\_133941.jpg









20260528\_133952.jpg



20260528\_133954.jpg



20260528\_133956.jpg



20260528\_133958.jpg





20260528\_134003.jpg



ET



20260528\_134007.jpg



20260528\_134008.jpg







20260528\_134022.jpg





20260528\_134026.jpg



20260528\_134032.jpg



20260528\_134033.jpg



20260528\_134035.jpg



20260528\_134037.jpg





















20260528\_135633.jpg





20260528\_135658.jpg

