


IMG_3876.jpeg



IMG_3877.jpeg

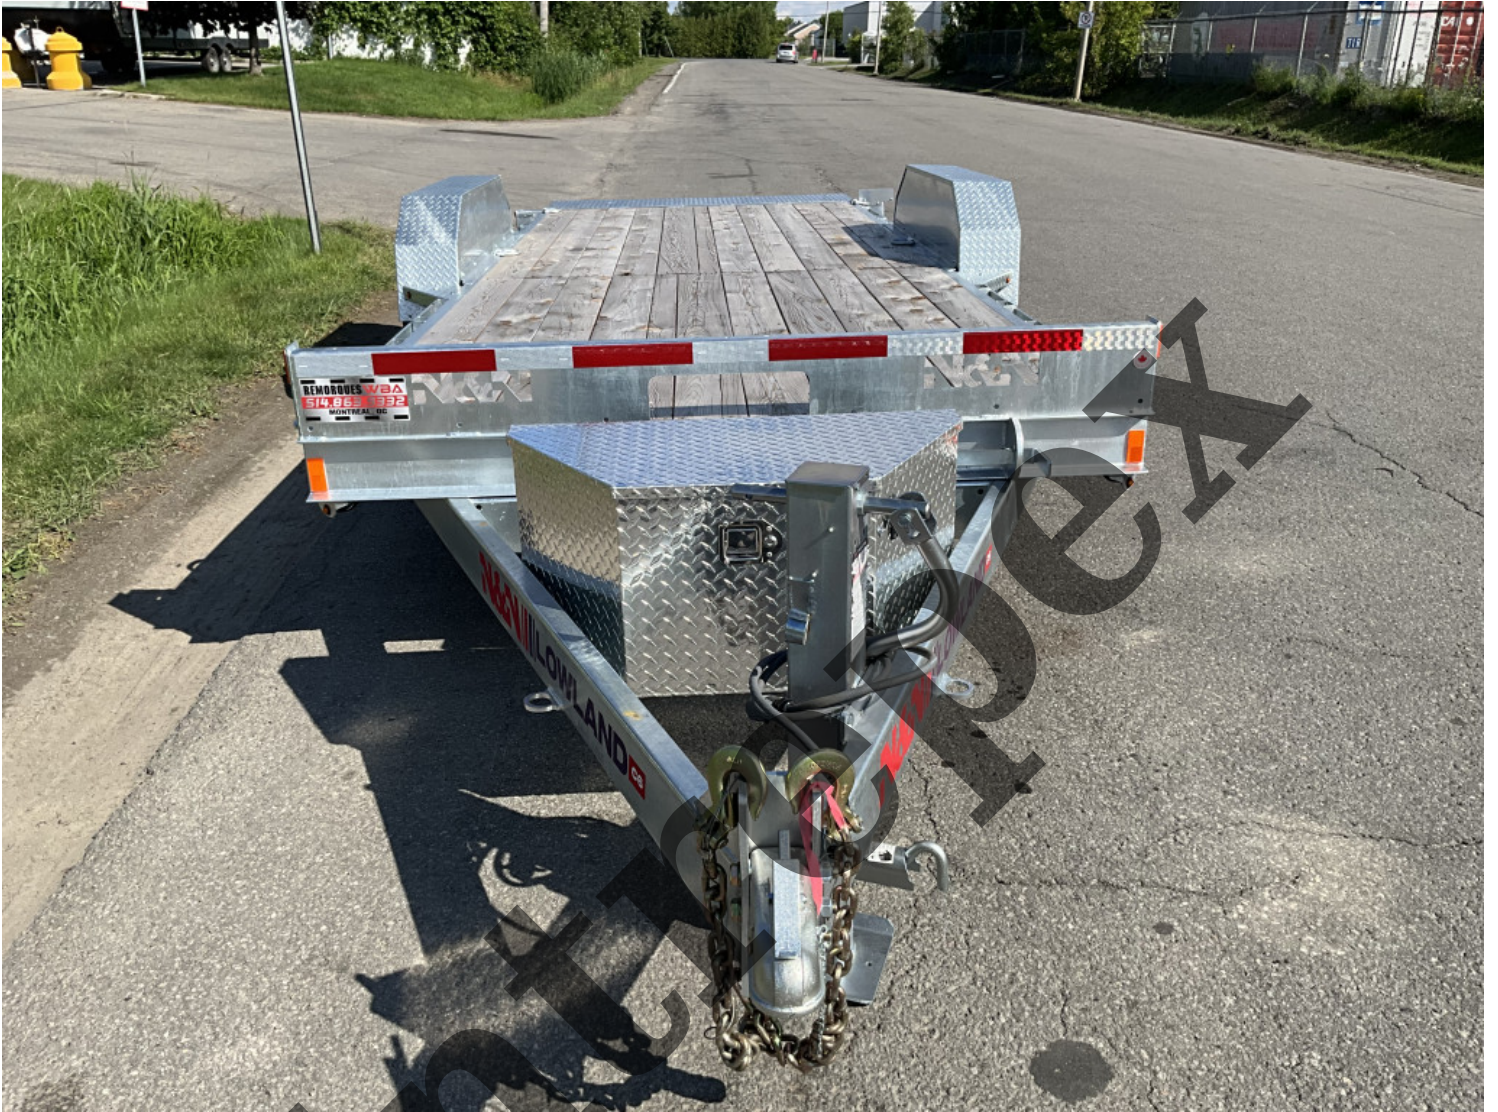

IMG_3878.jpeg



IMG_3879.jpeg



IMG_3880.jpeg



IMG_3882.jpeg



FOR SALE

IMG_3883.jpeg



IMG_3884.jpeg



IMG_3885.jpeg



IMG_3886.jpeg



IMG_3887.jpeg



IMG_3888.jpeg



IMG_3889.jpeg



IMG_3890.jpeg



IMG_3891.jpeg



IMG_3892.jpeg



IMG_3893.jpeg



IMG_3894.jpeg



FEI



TIRES AND LOADING INFORMATION
RENSEIGNEMENTS SUR LES PNEUS ET LE CHARGEMENT

The weight of the cargo should never exceed 5148 kg (11350 lb)
Le poids du chargement ne doit jamais dépasser 5148 kg (11350 lb)

TIRES PNEUS	SIZE DIMENSIONS	COLD TIRE PRESSURE PRESSION DES PNEUS A FROID	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS
FRONT AVANT	ST235/80R16G	758 KPA / 110 PSI	SEE OWNER'S MANUAL FOR ADDITIONAL INFORMATION VOIR LE MANUEL DE L'USAGER POUR PLUS DE RENSEIGNEMENTS NN-337-CA
REAR ARRIERE	ST235/80R16G	758 KPA / 110 PSI	
SPARE DE SECOURS	NONE	NONE	

MANUFACTURED BY/FABRIQUE PAR: N&N REMOVED INC. DATE: 03-2026

GVWR / PNBV 6804 KG (15000 LB)
GAWR (EACH AXLE) / PNBE (CHACQUE ESSIEU) 175 KG (3900 LB)
TIRE/PNEU ST235/80R16G RIM/JANTE 16X6.5 8H
COLD INFL. PRESS/PRESS. DE GONFL. A FROID 758 KPA (110 PSI/LPO) SINGLE

THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF MANUFACTURE SHOWN ABOVE. THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED UNDER THE CANADIAN MOTOR VEHICLE SAFETY REGULATIONS IN EFFECT ON THE DATE OF MANUFACTURE. CE VEHICULE EST CONFORME A TOUTES LES NORMES QUI LUI SONT APPLICABLES EN VERTU DU REGLEMENT SUR LA SECURITE DES VEHICULES AUTOMOBILES DU CANADA EN VIGUEUR A LA DATE DE SA FABRICATION.
V.I.N./N.I.V.: 2NEB320B11N056044 TYPE/TYPS: TRAILER TRAI/REM